


---

## Telescopic dismantling joint type PAS

- Dismantling joints are useful parts of equipment facilitating the replacement of armature
- The range of pipes covered by this product starts from DN 50 up to DN 500
- Working pressure PN10, tested on 1.6 multiple the working pressure
- Flanges according to EN 1092
- Made of ductile iron, epoxy coated, EPDM or NBR gasket, zinc or stainless steel screws and nuts

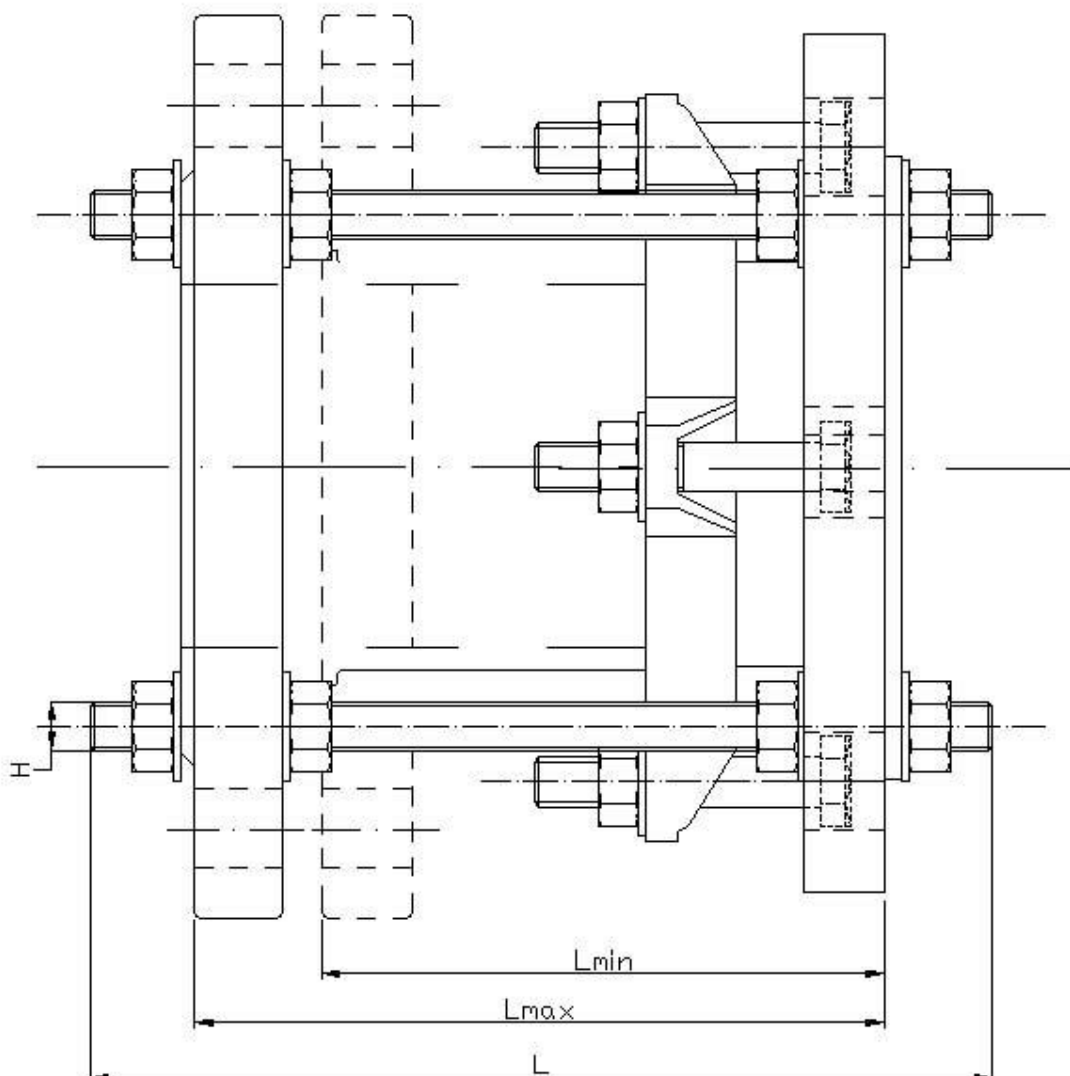

No	Element	Material	Coat
1	Flange adaptor	Ductile iron GGG 50	Epoxy coating (250 µm)
2	Flanged T-piece	Ductile iron GGG 50	Epoxy coating (250 µm)
3	Screws and nuts	zinc steel or stainless steel	
4	Gasket	EPDM	

### Specification

#### Dimensions

DN	Compensation mm	L min	L max	Threaded bolts	Weight kg
50	35	125	160	M16x250	7,6
65	35	130	165	M16x250	8,2
80	35	125	160	M16x250	9,5
100	40	130	170	M16x260	11,2
125	40	170	210	M20x300	16
150	45	165	210	M20x330	18,9
200	45	175	220	M20x340	24,5
250	70	205	275	M24x430	42,8
300	70	205	275	M24x430	50,8
400	80	250	330	M27x500	81,6
500	80	290	370	M30x500	114,5

Note: on request its possible to produce also dimension DN600- DN1000